

Tubo EO

Tested by TÜVRheinland®
Precisely Right.

REGISTERED DESIGN **R**



Ingombri minimi

NUMERO BRACCI

	2 BRACCI	3 BRACCI	4 BRACCI	6 BRACCI
--	----------	----------	----------	----------

SPORGENZA BRACCIO	165	215	265	315
165	173	271	355	532
215	223	346	455	682
265	273	421	555	832
315	323	496	655	982

Numero staffe

LARGHEZZA TENDA

240	241-300	301-360	361-410	411-480	481-540	541-600*	601-700 *	701-800 *	801-900 **	901-1100 **	1101-1400 ***
2 BRACCI							3 BRACCI			4 BRACCI	

NUMERO STAFFE

SPORGENZA BRACCIO	165	215	265	315
165	2	2	2	3
215	2	2	2	3
265	-	2	2	3
315	-	-	2	3


* 1 supporto compensatore

**2 supporti compensatore

***3 supporti compensatore


Dimensioni di ingombro PIUMA**

installazione a parete o soffitto

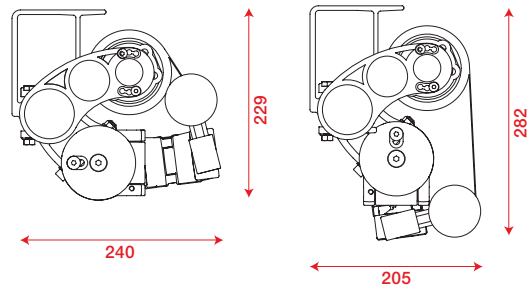


Dimensioni staffa**

installazione a parete o soffitto

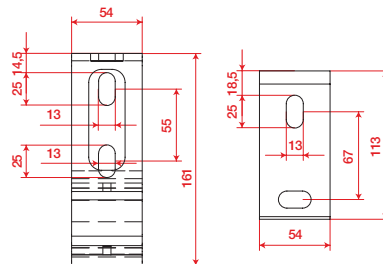

Lunghezza del braccio e inclinazione

installazione a parete o a soffitto

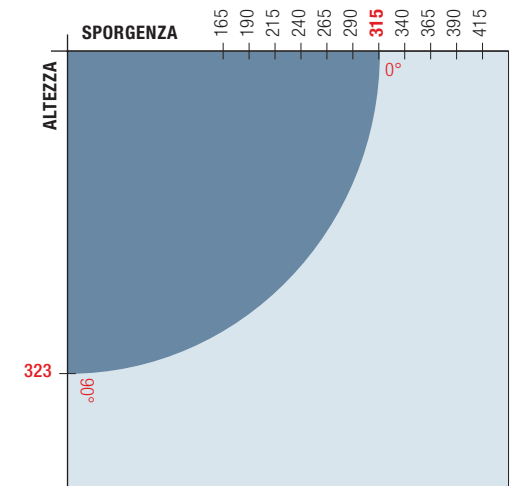

Caratteristiche tecniche



Le misure sono espresse in centimetri

** Le misure sono espresse in millimetri